


HARO Sports Floors

Dominating the game.

Berlin 30

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities

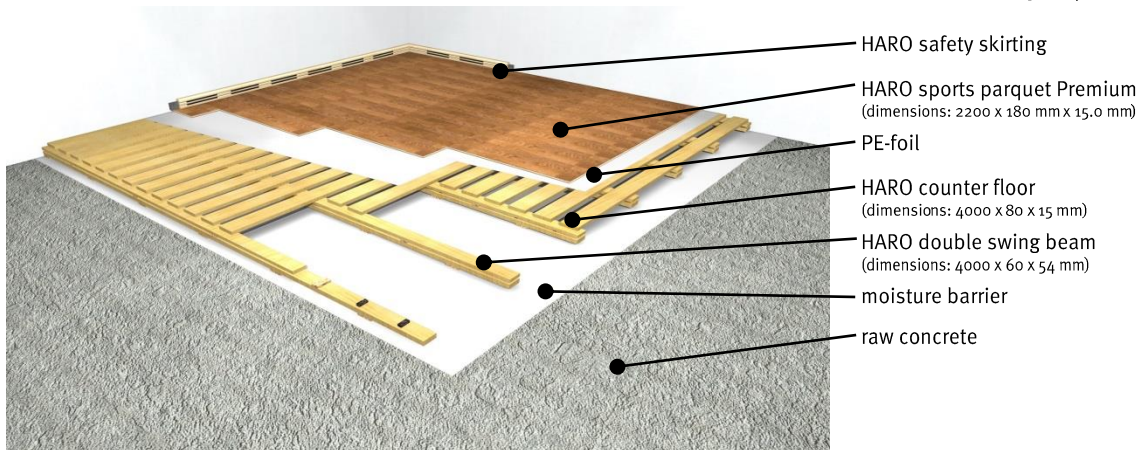

Installation from the top edge of raw concrete	Model Berlin 30
HARO double swing beam with dividers, shock absorption elements and support bearings laid out in longitudinal direction of the hall Distance centre to centre: 444 mm	54 mm
HARO counter floor Nailed crosswise onto the HARO double swing beam The HARO spruce counter floor is: <ul style="list-style-type: none"> • parallelly hemmed • planed all-over • kiln dried Distance centre to centre: 122mm	15 mm
PE-foil, 10 % overlapped, laid out loosely	0.03 mm
HARO sports parquet Premium nailed onto counterfloor modules solid wood top layer Factory-finished with a highly wear resistant PERMADUR® sealing	15.0 mm
Construction height	84 mm

Model BERLIN 30 meets and exceeds the EN 14904, DIN V 48032-2; April 2001 standards and is subject to the annual quality control RAL RZ 942

