


HARO Sports Floors

Dominating the game.

HELSINKI 50

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities
ideal for renovations

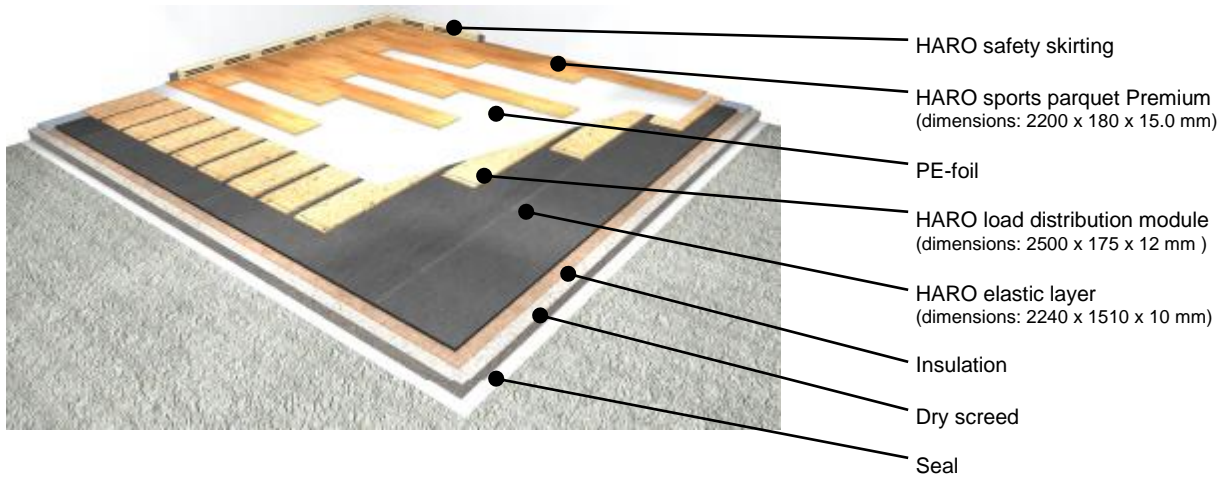

| Installation on an even sub-floor according to DIN 18202: 1997-04 chart 3, line 4 or on raw concrete with dry screed | Model Helsinki 50 |
|---|-------------------|
| HARO elastic layer joints offset, laid out loosely | 10 mm |
| HARO load distribution module Special plywood panel strips, front-end (175 mm) tongue and groove joints, BFU 100 according to DIN 68705, part 3 Dimensions: 2500 x 175 mm | 12 mm |
| PE-foil, 10% overlapped, laid out loosely | 0.03 mm |
| HARO sports parquet Premium stapled onto load distribution modules Solid wood top layer 5.6 mm Factory finished with a highly wear resistant PERMADUR® sealing | 15.0 mm |
| Construction height | 37 mm |

The HELSINKI 50 model entirely meets and exceeds the EN 14909, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942.

