


## HARO Sports Floors

Dominating the game.

### STOCKHOLM 20

Type: Area-elastic sports floor  
Usage: Sports and multi-purpose facilities

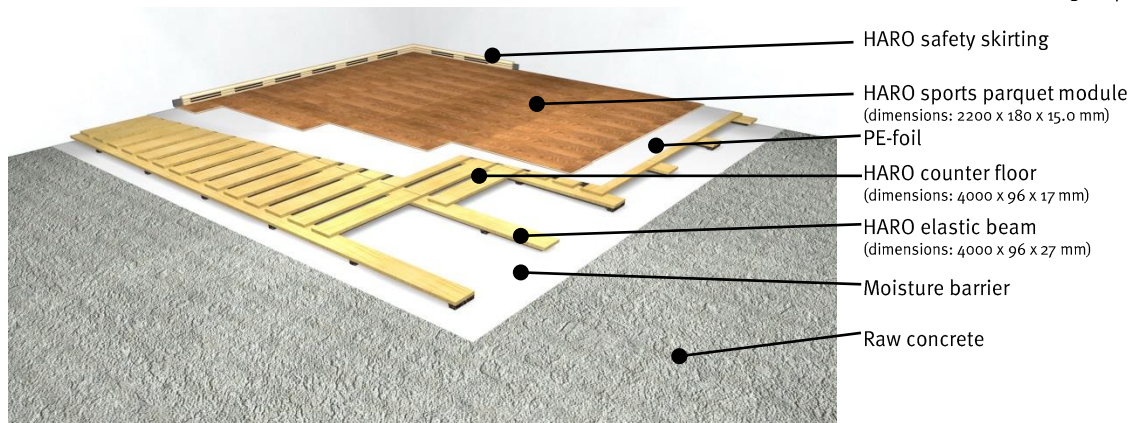

Underfloor  
heating  
compatible

| Installation from the top edge of raw concrete   | Model Stockholm 20 |
|--|--------------------|
| HARO elastic beam consisting of a spruce wooden beam with damping elements, distance centre to centre: 500 mm<br>Laid out in longitudinal direction of the hall  | 27 mm              |
| HARO counter floor mounted onto the HARO elastic beam<br>distance centre to centre: 137.5 mm<br>The spruce is: <ul style="list-style-type: none"> <li>• kiln dried</li> <li>• planed all over</li> <li>• parallel hemmed</li> <li>• fixed length production</li> </ul> | 17 mm              |
| PE-foil, 10% overlapped, laid out loosely  | 0.03 mm            |
| HARO sports parquet modules stapled onto counter floor<br>Solid hardwood top layer 5.6 mm<br>Factory-finished with a highly wear resistant PERMADUR® sealing   | 15.0 mm            |
| Construction height  | 59 mm              |

Model Stockholm 20 meets and exceeds the EN 14904 and DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942.

