


HARO Sports Floors

Dominating the game.

Berlin 12 F

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities

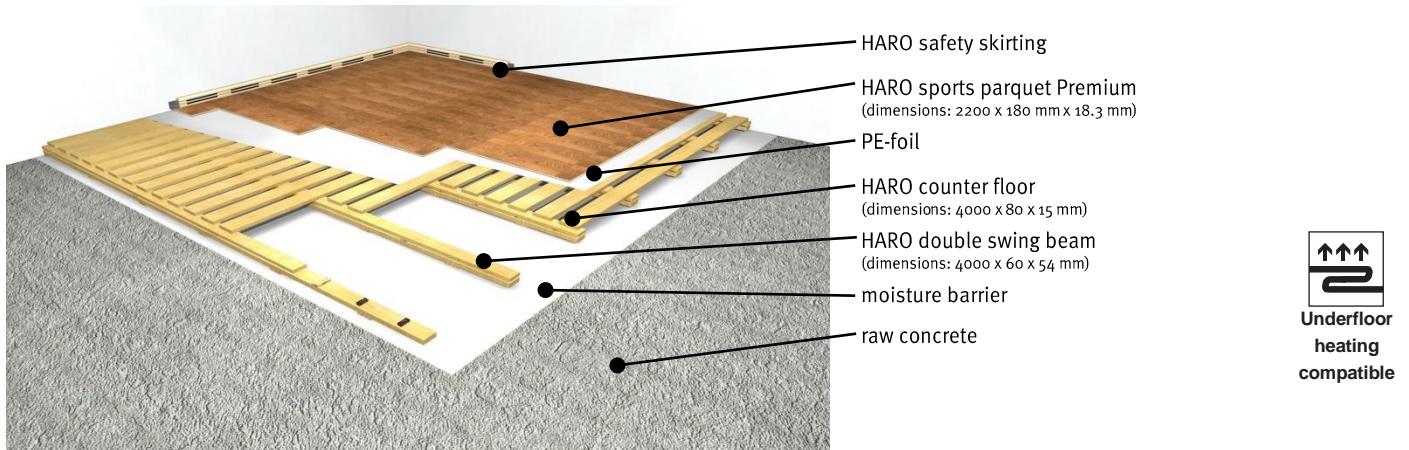

Installation from the top edge of raw concrete	Model Berlin 12 F
HARO double swing beam with dividers, shock absorption elements and support bearings laid out in longitudinal direction of the hall Distance centre to centre: 444 mm	54 mm
HARO counter floor Nailed crosswise onto the HARO double swing beam The HARO spruce counter floor is: <ul style="list-style-type: none"> • parallel hemmed • planed all-over • kiln dried Distance centre to centre: 122mm	15 mm
PE-foil , 10 % overlapped, laid out loosely	0.03 mm
HARO sports parquet Premium nailed onto counter floor modules solid wood top layer Factory-finished with a highly wear resistant PERMADUR® sealing	18.3 mm
Construction height	87.3 mm

Model BERLIN 12 F meets and exceeds the FIBA rules and the EN 14904, DIN V 48032-2; April 2001 standards and is subject to the annual quality control RAL RZ 942. It is also subject to the Austrian standard ÖISS directive 08/2005.

