


## HARO Sports Floors

Dominating the game.

### STOCKHOLM 10 F

Type: Area-elastic sports floor  
Usage: Sports and multi-purpose facilities

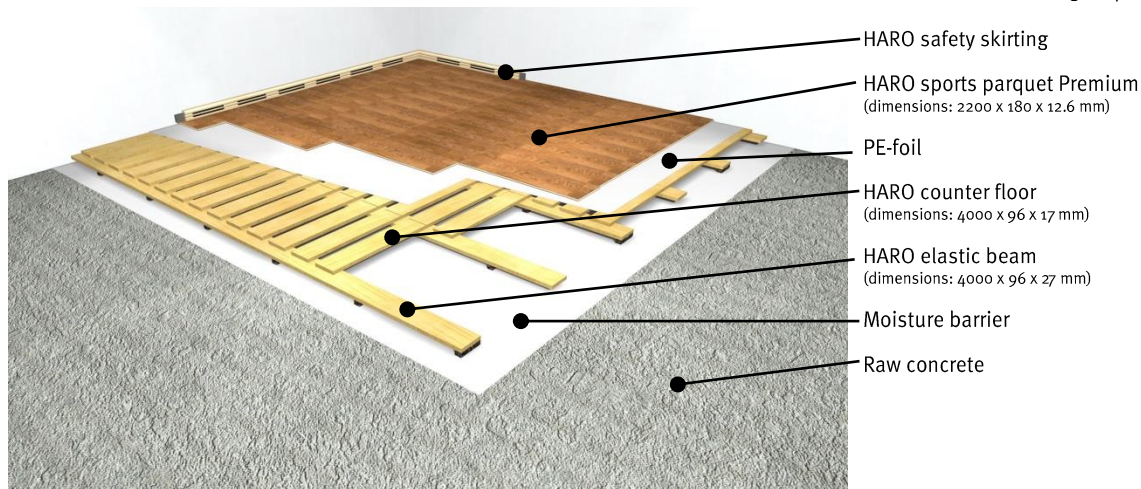

Underfloor  
heating  
compatible

Installation from the top edge of raw concrete	Model Stockholm 10 F
<b>HARO elastic beam</b> Consisting of a spruce wooden beam with pads Distance centre to centre: 500 mm	27 mm
<b>HARO counter floor</b> is nailed crosswise onto the HARO elastic beam, sawn 12 mm at the crossing point, distance centre to centre: 137 mm The spruce is: <ul style="list-style-type: none"> <li>• kiln dried</li> <li>• planed all over</li> <li>• parallel hemmed</li> </ul>	17 mm
PE-foil, 10% overlapped, laid out loosely	0.03 mm
<b>HARO sports parquet Premium</b> stapled onto the counter floor Solid hardwood top layer 3.6 mm Factory-finished with a highly wear resistant PERMADUR® sealing	12.6 mm
<b>Construction height</b>	56.6 mm

Model Stockholm 10 F meets and exceeds the EN 14904, FIBA rules 2010, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942

