


HARO Sports Floors

Dominating the game.

Protect Classic Celenio

Type: Area-elastic Protective Walls
Usage: Sports and multi-purpose facilities

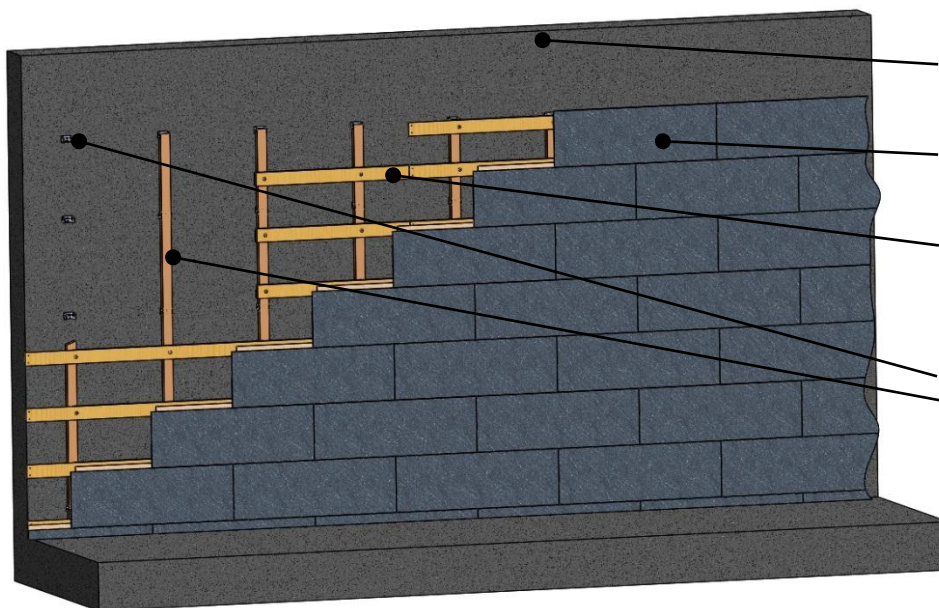

Solid walls

HARO Celenio wall coating,
screwed (concealed screws).

HARO Double swing beams

Sub-construction
- Steel right-angled assembly system
- Spruce bolts

Installation on an even wall surface according to DIN 18202, 1997-04, Chart 3

Model Protect Classic Celenio

HARO Sub-construction

Consisting of a steel right-angled assembly system with spruce bolts or wood panel modules

up to 750 mm

HARO Double swing beams

Made of plywood without elastic pads

39 mm

HARO wall coating, made of Celenio, screwed (concealed screws)

Single Element 526 x 350 mm
Double Element 1052 x 350 mm (Appearance like single)

17 mm

Construction height

96 mm

PROTECT CLASSIC CELENIO protective walls meet the DIN 18032-1, April 2001, the DIN 18032-3, April 199, the safety information requirements of the Unfallkasse Sachsen _Accident Insurance from Saxony_ (GUV-SI 8468) and the DIN CERTCO certification program for protective walls.

