


HARO Sports Floors

Dominating the game.

Protect Classic Plywood VNK

Type: Area-elastic Protective Walls
Usage: Sports and multi-purpose facilities

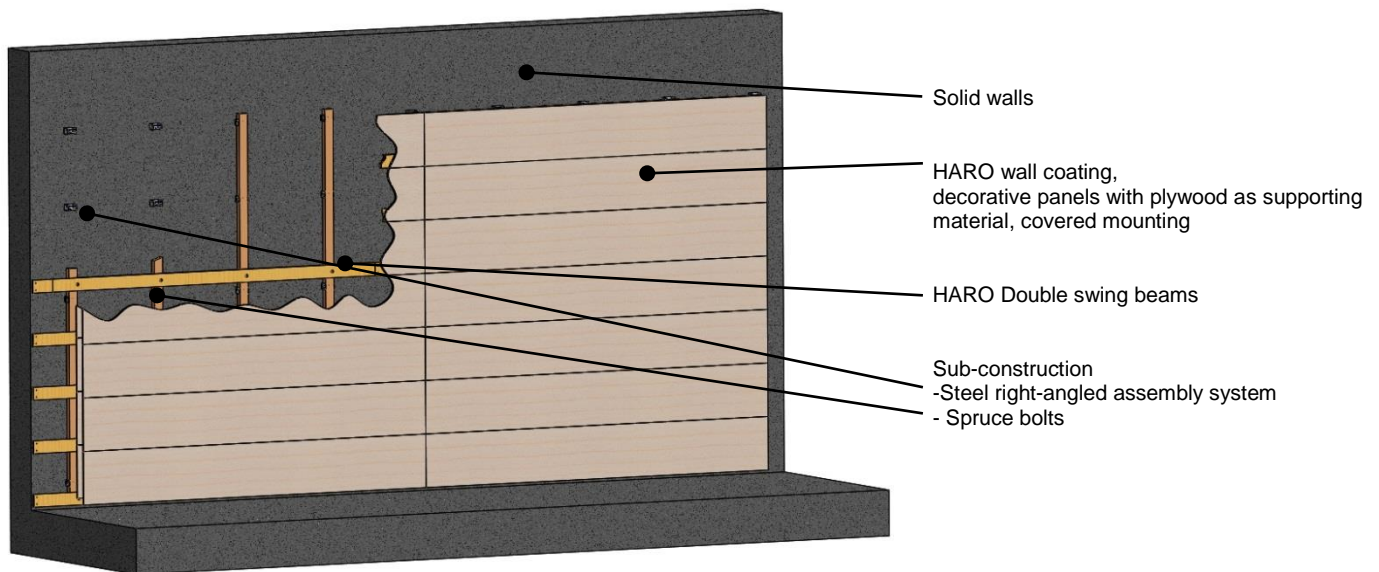

Installation on an even wall surface according to DIN 18202, 1997-04, Chart 3	Model Protect Classic Plywood VNK
HARO Sub-construction Consisting of steel right-angled assembly system with spruce bolts or wood panel modules	40 - 750 mm
HARO Double swing beams Made of plywood without elastic pads	39 mm
HARO wall coating , made of plywood with decorative covering, sharp edges removed, screwed (concealed screws) Standard length: 2.450mm Standard width: 400mm, 600mm, 1200mm	15 mm
Construction height	94 mm

PROTECT CLASSIC PLYWOOD VNK protective walls meet the DIN 18032-1, April 2001, the DIN 18032-3, April 199, the safety information requirements of the Unfallkasse Sachsen _Accident Insurance from Saxony_ (GUV-SI 8468).

