


## HARO Sports Floors

Dominating the game.

### Protect Light 24

Type: Area-elastic protective wall  
Usage: Sports and multi-purpose facilities

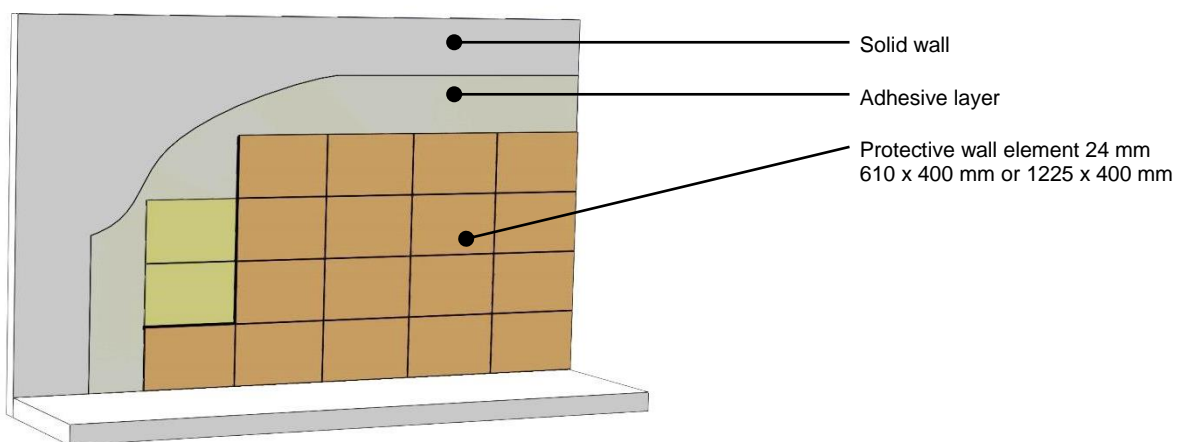

Installation on an even wall surface according to DIN 18202, 2005-02, chart 3, line 7, see below

Model Protect Light 24

HARO Protect Light 24 protective wall element consisting of: 15 mm elastic layer and circumferentially grooved 9 mm birch plywood + separate tongue

24 mm

Construction height

24 mm

The protective wall PROTECT Light 24 meets the DIN 18032-1, April 2001 and the DIN 18032-3, April 1997 requirements as well as the safety information requirements of the Unfallkasse Sachsen (GUV-SI 8468).

Necessary flatness tolerances acc. to DIN 18202, chart 3:

|             | Centre distance limits in mm with measuring point distances in m |     |   |     |   |     |   |    |
|-------------|--|-----|---|-----|---|-----|---|----|
|             | 1  | 1,5 | 2 | 2,5 | 3 | 3,5 | 4 | m  |
| Requirement | 3  | 4   | 5 | 6   | 6 | 7   | 8 | mm |

