


HARO Sports Floors

Dominating the game.

Protect Light 33

Type: Area-elastic protective wall
Usage: Sports and multi-purpose facilities

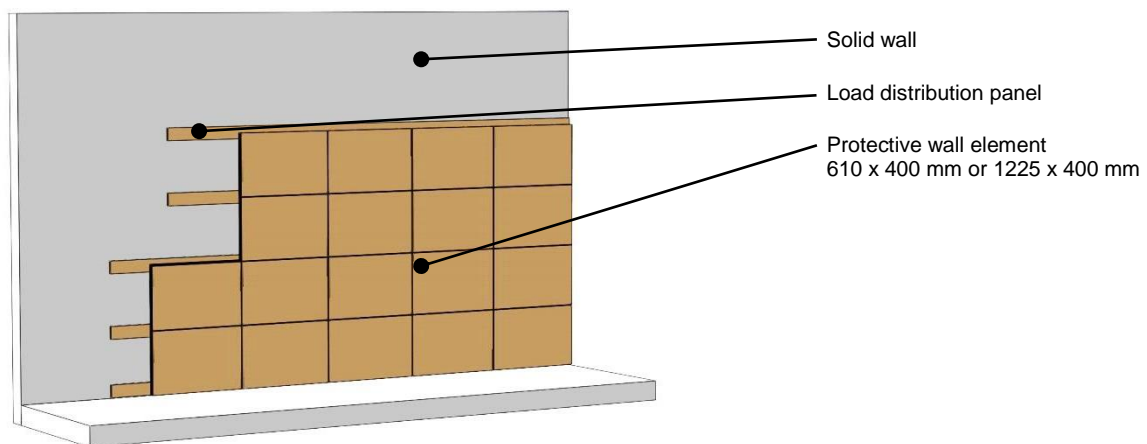

Installation on an even wall surface according to DIN 18202, 2005-02, chart 3, line 7	Model Protect Light 33
HARO Protect Light 33 protective wall element consisting of: HARO load distribution panel 15 mm plywood to balance out the unevenness.	15 mm
HARO protective wall plates consisting of: 9 mm plywood 15 mm elastic layer 9 mm plywood Factory mounted and screwed onto the load distributors.	33 mm
Construction height	33 mm + 15 mm

The protective wall PROTECT Light 33 meets the DIN 18032-1, April 2001 and the DIN 18032-3, April 1997 requirements as well as the safety information requirements of the Unfallkasse Sachsen (GUV-SI 8468).



HAMBERGER®

ISO 9001
quality system approved

HAMBERGER®

ISO 14001
environmental quality

