


# HARO Sports Floors

Dominating the game.

## Berlin 12 F

Type: Area-elastic sports floor  
Usage: Sports and multi-purpose facilities

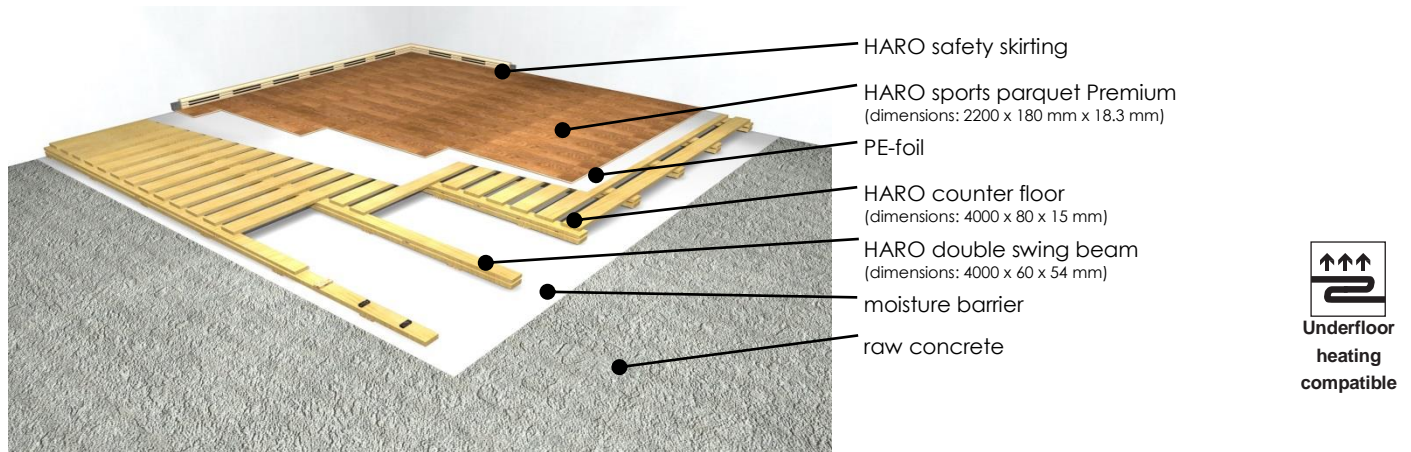

Installation from the top edge of raw concrete	Model Berlin 12 F
<b>HARO double swing beam</b> with dividers, shock absorption elements and support bearings laid out in longitudinal direction of the hall  Distance centre to centre: 444 mm	54 mm
<b>HARO counter floor</b> Nailed crosswise onto the HARO double swing beam  The HARO spruce counter floor is: <ul style="list-style-type: none"> <li>• parallel hemmed</li> <li>• planed all-over</li> <li>• kiln dried</li> </ul> Distance centre to centre: 122mm	15 mm
<b>PE-foil</b> , 10 % overlapped, laid out loosely	0.03 mm
<b>HARO sports parquet Premium</b> nailed onto counter floor modules solid wood top layer Factory-finished with a highly wear resistant PERMADUR® sealing	18.3 mm
<b>Construction height</b>	<b>87.3 mm</b>

Model BERLIN 12 F meets and exceeds the EN 14904, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL RZ 942. It is also subject to the Austrian standard ÖISS directive 08/2005.

