


HARO Sports Floors

Dominating the game.

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities
ideal for renovations

Helsinki 10-10

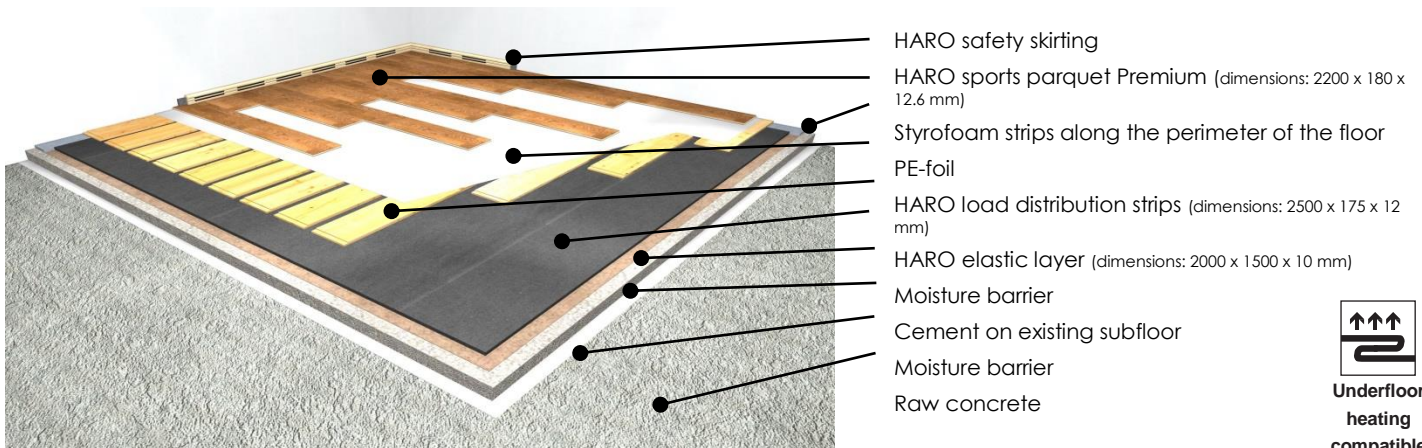

Installation on an even sub-floor according to DIN 18202: 1997-04 chart 3, line 4	Model Helsinki 10-10
HARO elastic layer joints offset, laid out loosely	10 mm
HARO load distribution strips Tongue and groove ends, glued together, consisting of: -Plywood strips BFU 100 acc. to DIN 68705, part 3, dimensions: 2500 x 175 mm	12 mm
PE-foil, 10 % overlapped, laid out loosely	0.03 mm
HARO sports parquet Premium , is an engineered hardwood flooring, tongue and groove gluing, stapled onto the load distribution strips Solid wood top layer 3.6 mm Factory finished with a highly wear resistant PERMADUR® sealing	12.6 mm
Construction height	34.6 mm

Model HELSINKI 10-10 entirely meets and exceeds the EN 14904, FIBA rules 2010, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942.

