


HARO Sports Floors

Dominating the game.

HELSINKI 55

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities
ideal for renovations

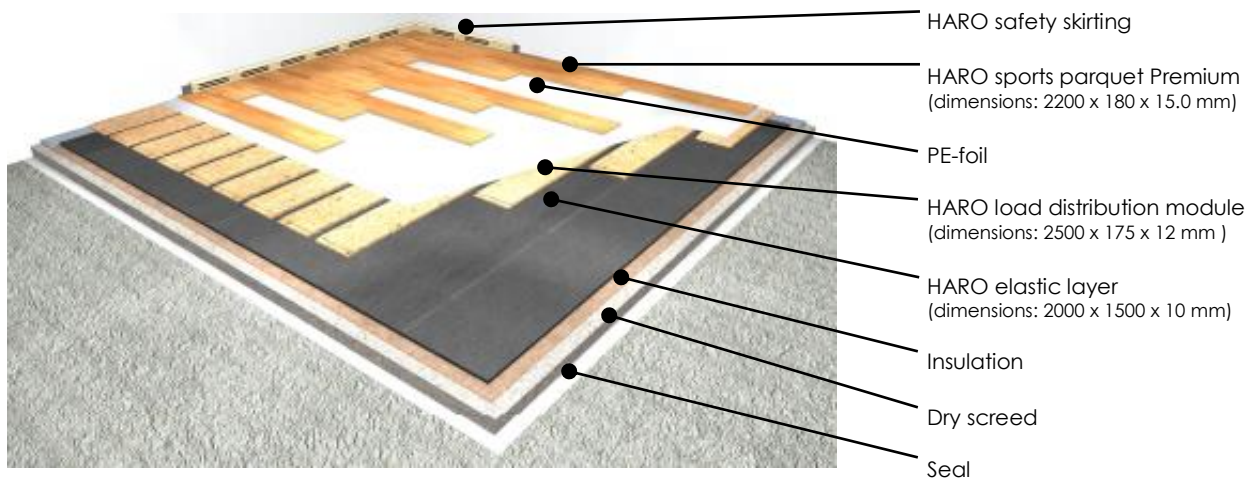

Installation on an even sub-floor according to DIN 18202: 1997-04 chart 3, line 4 or on raw concrete with dry screed	Model Helsinki 55
HARO elastic layer joints offset, laid out loosely	10 mm
HARO load distribution module Special OSB flat press boards, front-end (175 mm) tongue and groove joints, with building approval Dimensions: 2500 x 175 mm	12 mm
PE-foil 10 % overlapped, laid out loosely	0.03 mm
HARO sports parquet Premium stapled onto load distribution modules Solid wood top layer 5.6 mm Factory finished with a highly wear resistant PERMADUR® sealing	15.0 mm
Construction height	37 mm

The HELSINKI 55 model entirely meets and exceeds the EN 14909, DIN V 18032-2; April 2001 standards

