


## HARO Sports Floors

Dominating the game.

### Protect Light 19

Type: Area-elastic protective wall  
Usage: Sports and multi-purpose facilities

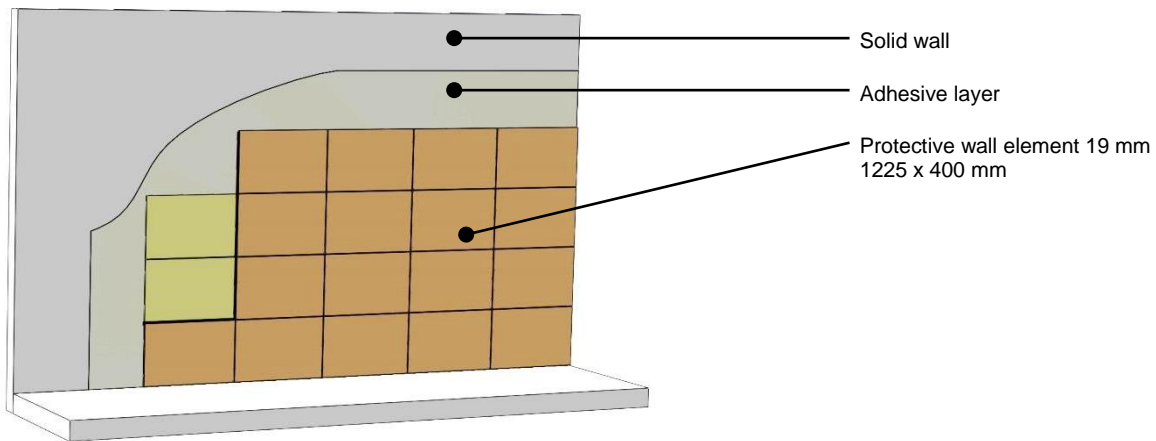

Installation on an even wall surface according to DIN 18202, 2005-02, chart 3, line 7, see below

Model Protect Light 19

HARO Protect Light 19 protective wall element consisting of:  
10 mm elastic layer and circumferentially grooved 9 mm birch plywood + separate tongue

19 mm

Construction height

19 mm

The protective wall PROTECT Light 19 meets the DIN 18032-1, April 2001 and the DIN 18032-3, April 1997 requirements as well as the safety information requirements of the Unfallkasse Sachsen (GUV-SI 8468).

Necessary flatness tolerances acc. to DIN 18202, chart 3:

Centre distance limits in mm with measuring point distances in m

	1	1,5	2	2,5	3	3,5	4	m
Requirement	3	4	5	6	6	7	8	mm

