


HARO Sports Floors

Dominating the game.

STOCKHOLM 10 F

Type: Area-elastic sports floor
Usage: Sports and multi-purpose facilities

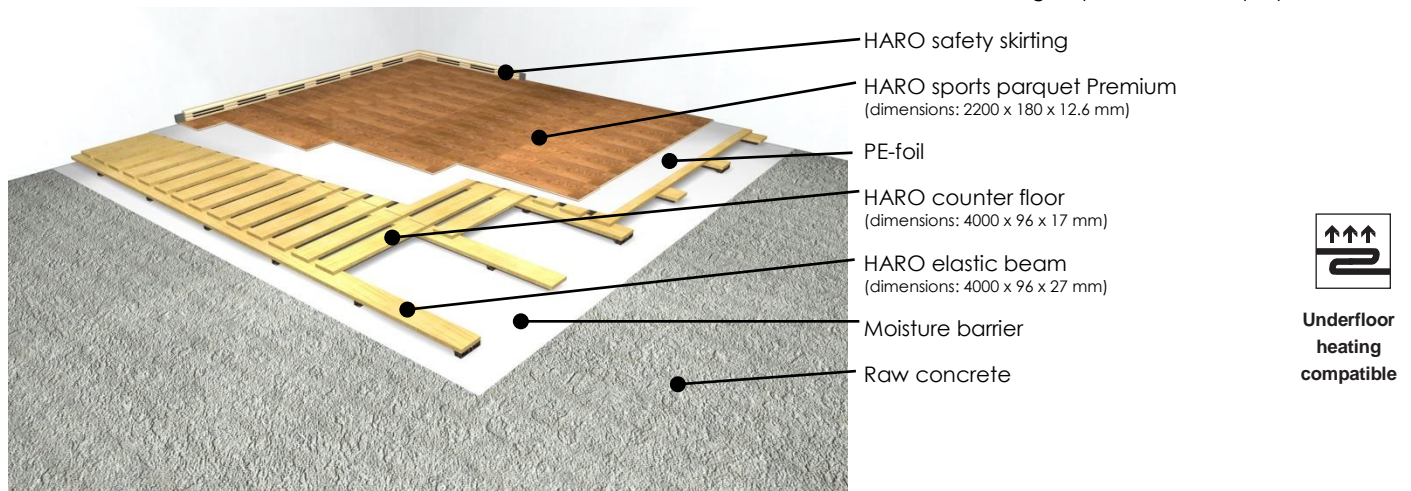

Installation from the top edge of raw concrete	Model Stockholm 10 F
HARO elastic beam Consisting of a spruce wooden beam with pads Distance centre to centre: 500 mm	27 mm
HARO counter floor is nailed crosswise onto the HARO elastic beam, sawn 12 mm at the crossing point, distance centre to centre: 137 mm The spruce is: <ul style="list-style-type: none"> • kiln dried • planed all over • parallel hemmed 	17 mm
PE-foil , 10% overlapped, laid out loosely	0.03 mm
HARO sports parquet Premium stapled onto the counter floor Solid hardwood top layer 3.6 mm Factory-finished with a highly wear resistant PERMADUR® sealing	12.6 mm
Construction height	56.6 mm

Model Stockholm 10 F meets and exceeds the EN 14904, FIBA rules 2010, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942

