


HARO Sports Floors

Dominating the game.

MONTREAL 21

Type: Area-elastic sports floor Usage: Sports and multi-purpose facilities

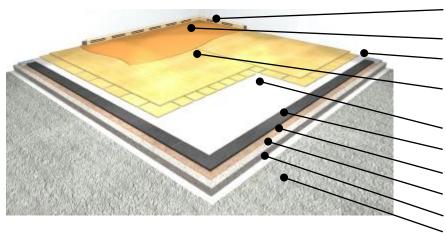

HARO safety skirting

Sports coating

Styrofoam strips along the perimeter of the floor

HARO load distribution module with distribution plate (dimensions: 2500 x 1250 x 24 mm)

PF-foil

HARO elastic layer (dimensions: 2000 x 1500 x 15 mm)

Moisture barrier

Cement on existing subfloor

Moisture barrier

Raw concrete



compatible

Installation on an even sub-floor according to DIN 18202, 1997-04 chart 3, line 4	Model Montreal 21
HARO elastic layer joints offset, laid out loosely	15 mm
PE-foil 10% overlapped, laid out loosely	0.03 mm
 HARO load distribution module Plywood panels BFU 100 acc. to DIN 68705 part 3; dimensions 2000 x 1250 x 12 mm Plywood distribution plates Dimensions: 228/121 x 228 x 12 mm and OSB distribution plates Dimensions: 228/121 x 12 mm Joints offset, glued and screwed together at the connecting joints 	24 mm
Construction height (without sports coating)	39 mm

Model MONTREAL 21 meets and exceeds the EN 14904, DIN V 18032-2; April 2001 standards and is subject to the annual quality control RAL GZ 942.











